


Robotic Palletizer

Compact and adaptable

Adaptable layout to production constraints
 Ability to handle multiple products simultaneously
 Up to 12 pallet magazine available
 Slip sheet and palet placement
 Low maintenance design
 Integrated industrial robot

SPECIFICATIONS:

Robot	Mitsubishi RV-70F
Speed	20 picks por minuto
Case size range	Length: 600mm
	Width: 600mm
	Height: 400 mm
	Custom sizes are available, please inquire.
Pallet size	Width: 1000 mm, Length: 1200 mm
Payload	Up to 50 kg
Stacking Height	1600 mm
Magazine Capacity	12 pallets
Finish	Epoxy coated steel mesh guarding and enclosure
Guarding	3-level security system, integrating Mitsubishi technology according to NOM IEC 61508 SIL3 and ISO 13849-1 Ple
	Perimeter security mesh with door interlock and curtains
Electrical	- Mitsubishi PLC Serie R
	- Mitsubishi HMI GOT 10in, color, touchscreen
	- Balluff distributed IO and sensors
	- NEMA 12 enclosures
Pneumatics	- SMC
Installation	Power: 230 VCA, 20 AMPS, 3 Phase. Control voltage: 24VDC. Air: 90 PSI. Temp: 0° a 40° C.
Options	Conveyor of entrance and exit.

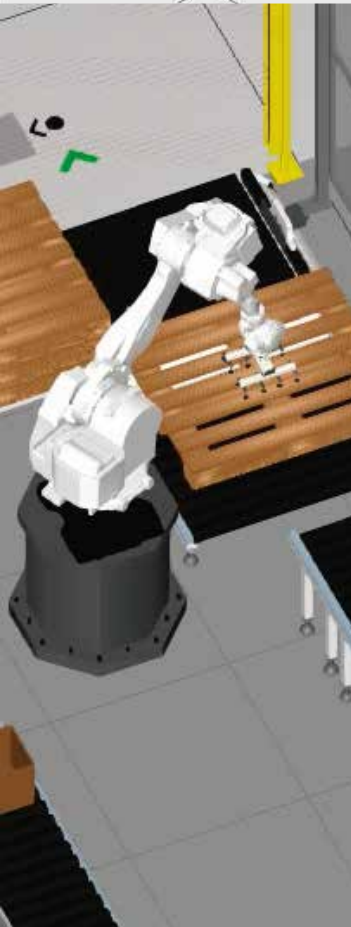

Blvd. Jaime Benavides Pompa 1039 col. Villas de nogalar
 25900 Ramos Arizpe, Coah.
 Tel: 01 844 430 9410
www.nexonautomation.com